



Threads

CMPT 201

Slides 7

Based on content
created by Dr. Steve Ko
© Dr. B. Fraser

Topics

- How can two “threads of execution” share the same memory space?
- How can we start and work with threads?

What's a Thread

- What is a Thread?

- ..

- Similar to a process but it's lighter weight.
 - Sometimes called..

- Main Thread

- A process always has at least one thread, called **main thread**: from **main()**

Details

- Can find more info in OSTEP book
(more depth than we require)
 - Chapter 26 Concurrency: An Introduction
<https://pages.cs.wisc.edu/~remzi/OSTEP/threads-intro.pdf>
 - Chapter 27 Interlude: Thread API
<https://pages.cs.wisc.edu/~remzi/OSTEP/threads-api.pdf>

Threads vs Processes

Thread vs Process

- If threads and processes execute in parallel on different cores, then what are the difference?

- ..

`fork()` creates a child process with its own address space.


- ..

text, data, bss, and heap segments.

- Each thread gets its own:

- stack
 - registers
 - program counter (running different function)
 - errno

Process A's
address space

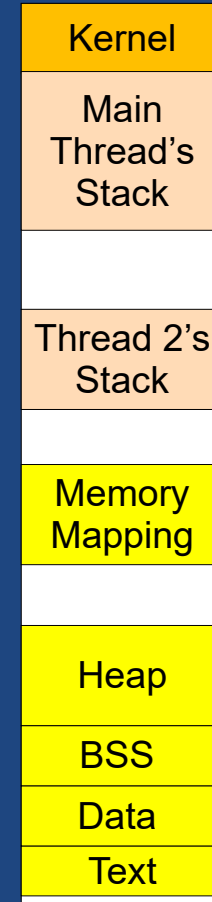

Benefits on Threads & Processes

- **Benefit of a thread**
 - Threads in a process share the same addresses
 - ..
 - **E.g.**, any thread can read from or write to a global variable.
Can pass pointers between them.
 - ..
- **Benefit of a process**
 - ..

POSIX Threads

man pthreads

```
pthread(7)                Miscellaneous Information Manual                pthread(7)

NAME
    pthreads - POSIX threads

DESCRIPTION
    POSIX.1 specifies a set of interfaces (functions, header files) for
    threaded programming commonly known as POSIX threads, or Pthreads. A sin-
    gle process can contain multiple threads, all of which are executing the
    same program. These threads share the same global memory (data and heap
    segments), but each thread has its own stack (automatic variables).
```

- **man pthreads**

Review sections:

- Description: What's shared & not
- Return value & errno
- Thread ID
- Thread safe Functions

Common Functions

- `pthread_create()`
 - Check man page
 - `pthread_t`: this is the type used for thread IDs.
 - ..
(that will run as a thread).
 - `void *arg`, passed in.
 - `void*` can be cast to any pointer.
Use a struct to pass multiple arguments.
 - `pthread_attr_t` specifies various attributes of the new thread.
- `pthread_exit()` terminates the calling thread.
 - Done implicitly when returning from thread function
`return 0; // Leaving thread function!`

Common Functions

- `pthread_self()`
 - Returns the caller's id
 - ..
- `pthread_join()`
 - ..
 - Thread return value with ``void **retval``.
- `pthread_detach()`
 - Lets the calling thread just run.
 - You can use this when you don't need to return anything.

ABCD: PThread

- Each **thread** gets its own...

- a) **Stack**
- b) **Heap**
- c) **Text / Code**
- d) **stdout**

ABCD: pthread_create()

- Which of the following is true about `pthread_create()`?
 - a) It creates a new process running the provided thread start function.
 - b) It passes nothing to the function (void).
 - c) It waits until the spawned thread finishes.
 - d) It stores the `thread_id` for later user.

Pthread Activity

- [15 min] Write a program where:
 - Main thread will:
 - create another thread.
 - wait until thread terminates,
 - print out the return value.
 - New thread accept a string as its argument,
 - print out the argument and its own ID (use `gettid()`),
 - return the length of the received string.

Start simple!
Make a thread
and print "hi"!

Thread function can return a number:
`return (void*) 42;`

main() can get the number:
`void* ret_val = 0;`
`pthread_join(...);`
`printf("%ul", (uint64_t) ret_val);`

- Compile with `-pthread` compiler option:
e.g., clang -pthread example.c`.`

Data Race

Data Race Activity

- [10 min] Activity:

Write a program that has two additional threads.

- Create global variable:

```
int cnt = 0;
```

- Each new thread adds 1 to `cnt` 10 million times.

- Main thread waits for new threads, and prints `cnt`.

- Run multiple times; see output!

Deterministic

- Deterministic:

- ..

Usually, this is what we want!

- Note that the “behaviour” might not be the same each time: the order that threads get scheduled will be different each time.
 - However, non-deterministic behaviour does not lead to non-deterministic output unless you have a race case.



Usually, what we want to avoid!

Data Race Problem

- Consider the statement `counter++`
 - It seems like `counter++` is one operation.
 - ..

```
int tmpRegister = counter;    // Load from memory
tmpRegister++;               // Charge value
counter = tmpRegister;        // Store value to memory
```

- What happen if this runs on 2 threads? (assume counter = 5)

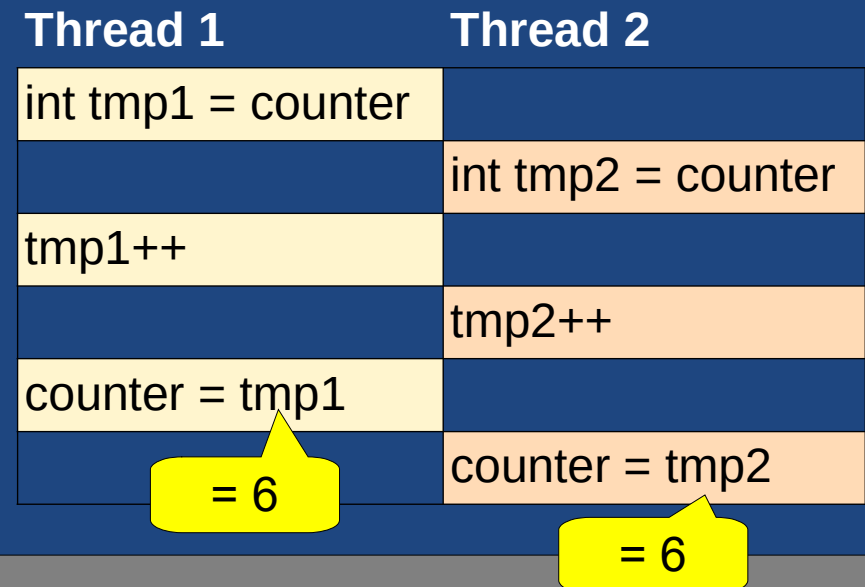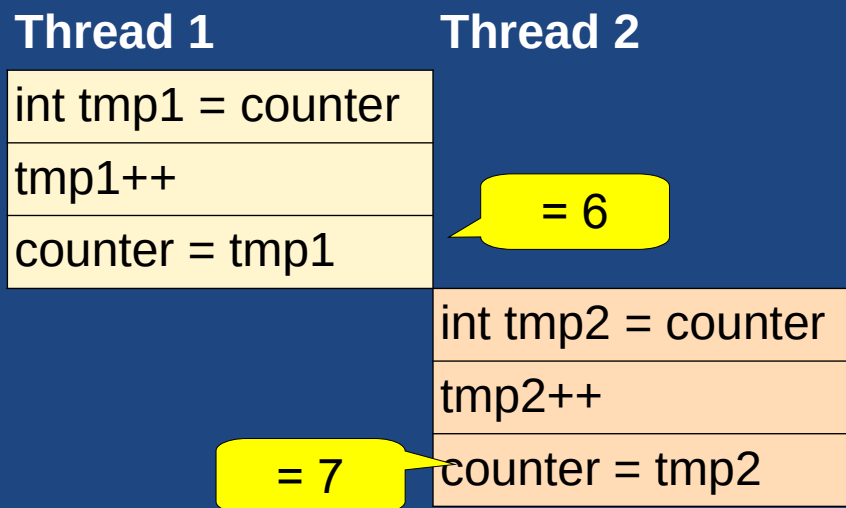

Race Condition

- **Data Race**
 - This is called the data race problem:
..
- **Race Condition**
 - More generally, a **race condition** is a condition in which
..
- **Difference between a Data Race and a Race Condition**
 - Very similar and related ideas.
 - We'll not get into details. For more info:
<https://blog.regehr.org/archives/490>

Summary

- **Threads**
 - Lightweight processes that share a memory space.
 - Always have main thread
- **PThread**
 - POSIX library / API for threads
 - `pthread_create()`, `pthread_join()`, ...
- **Data Race**
 - When two threads may access the same data at the same time.